

Powered by




Intelligence
Inside

TWIN SERIES

IMPROVE THE WORK ENVIRONMENT FROM LIGHTING
SPHERE. GOOD LIGHT IMPROVES EFFICIENCY AND ATTITUDE.

TWIN.

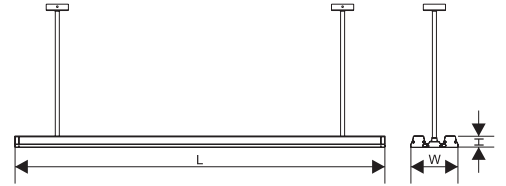


Parameters

Model	Power	Luminous Flux	Efficacy	Size
P5136-45W	45W	4275LM	95lm/W	1167*149*36mm
K5136-45W	45W	4860LM	108lm/W	1167*149*36mm


Input Voltage: AC180-240V
 Frequency: 50/60Hz
 Power Factors: ≥ 0.5
 Efficiency: 90%
 CCT: 4000 ~ 6500K
 CRI: Ra ≥ 80
 Beam Angle: 60° 120°
 Frame Material: Aluminum 6063
 Base Material: Iron Q235
 Lampshade: PS
 Body Color: Sand Black
 Input Cable: 3x0.5mm²
 Installation: Suspended
 Protection: IP20
 Environment: -20°C ~ 40°C
 Longevity: 20,000h

Packing

Model	Weight/PC	Qty/CTN	Inner Box Size	Master CTN
P5136-45W	2.1	5	-	118*16*23cm
K5136-45W	2.1	5	-	118*16*23cm

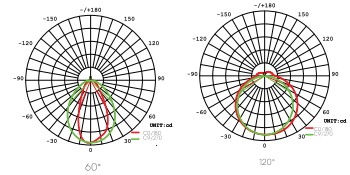

DETAILS

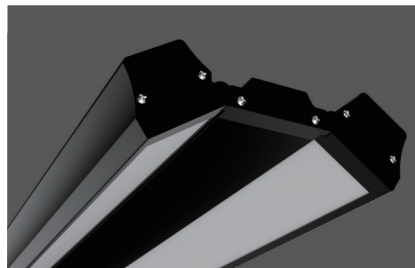

Private mold reflectors. Easy installation.
Angle Adjustable